



Easy

STATIC NEUTRALIZING SYSTEM

The innovative Easy static neutralizing system offers superior performance in a space saving design with an integrated high voltage power supply.

- 24 VDC input
- High voltage power supply & static bar in one integrated design
- Alarm output to power low voltage devices for remote alarm sensing
- Designed for rugged industrial use and easy cleaning
- IP66 rated for protection against particulate and splash
- Shockless emitter points


Industrial Static Control

WWW.SIMCO-ION.COM




Specifications

Operating Distance	Speed bar: 2" to 9" (50-225 mm); Hybrid bar: 4" to 18" (101-455 mm)
Emitter Point	Special alloy
Connector	M12 (straight or angled)
Temperature	0-131°F (0-55°C)
Cable	Low voltage
Power Supply	Integrated, 24 VDC voltage input (0.5 ADC max)
Effective Length	Speed bar: 5.9-152.36" (150-3870 mm); Hybrid bar: 10.6-145.3" (270-3690 mm)
Enclosure	Fiber-reinforced polyester
Weight	0.1 lb/in (1.8 g/mm)
Dimensions	Speed bar: 10.83-156.85" (275-3984 mm); Hybrid bar: 15.12-149.76" (384-3804 mm);
Certification	CE/IP66

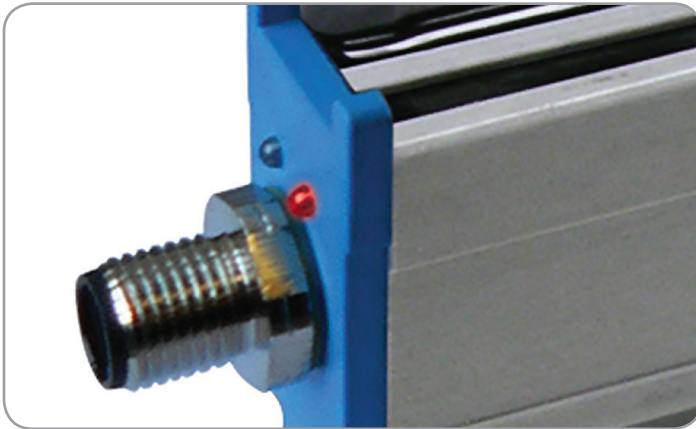

Bar Status LEDs

Dimensions

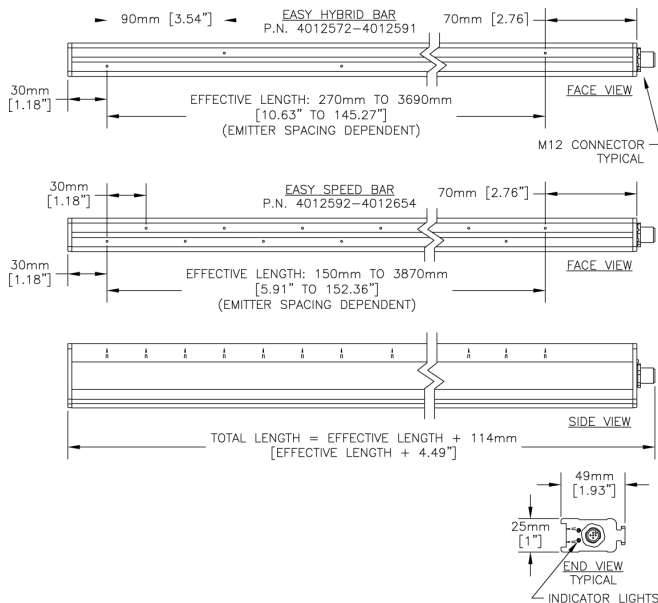


The rugged Easy static neutralizing system has an integrated high voltage power supply and requires only a low voltage input of 24 VDC. M12 connectors come either straight or angled, with 5 meter cable.


Two LEDs located on the end of the bar indicate status. The green LED indicates when the bar is in operation and the red LED indicates internal fault conditions. The alarm output of the Easy can control a variety of low power devices for remote sensing of the bar alarm status. The Easy bar is IP66 rated which protects the bar from particulate and liquids in areas prone to spray. Universal mounting brackets are supplied for various mounting options.

Easy bars are available in two variations:

- **Speed** – Recommended for most applications including high speed webs. Working distance from 2"-9" (50-225 mm).
- **Hybrid** – Recommended for applications where greater distances are required and lesser web speeds are used. Working distance from 4"-18" (101-455 mm).

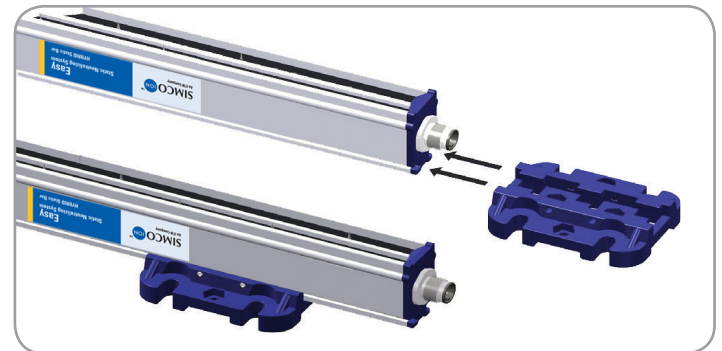

Mounting bracket

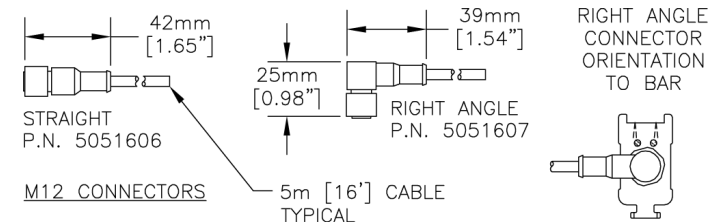

Connectors

SIMCO IONTM
An ITW Company

P/N 5201062 Rev. G
© 2013 Simco-Ion - All rights reserved.
Specifications are subject to change without notice.

Simco-Ion

2257 North Penn Road
Hatfield, PA 19440-1998
Tel: 800.203.3419 (in USA)
Tel: 215.822.6401

customerservice@simco-ion.com
www.simco-ion.com